


Fritz!box 7430 Quick Start Guide

Step 1: Connect the 12V 2A DC Power Supply Unit (PSU)


- Connect the PSU (C) to the Fritz!Box (B) as per above diagram.
- Connect the PSU (C) to the nearest power socket.

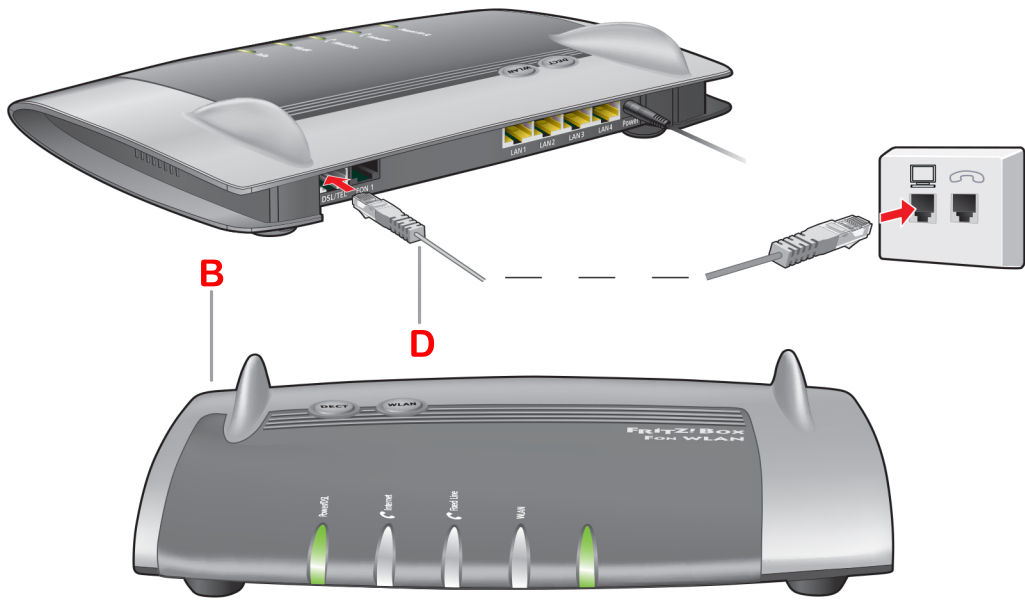


Step 2: Connect the DSL or Ethernet Cable

- Connect the larger RJ45 connector on the DSL phone cable (D) to the DSL/TEL port on the back of the Fritz!Box (B)
- Connect the smaller RJ11 connector on the DSL phone cable (D) to the installed dedicated Fibre data socket as shown on left below.
- Wait up to 5 mins for the Power/DSL light on your Fritz!Box to go steady green. The VoIP “Internet” light will only activate if you have opted for a Digiweb Broadband Talk VoIP package.
- If the Power/DSL light on your Fritz!Box fails to go steady green, please check your cable connections are firmly connected and ensure that you are connected to the correct dedicated Fibre data socket.
- Upon completing the above checks and where the Power/DSL light on your Fritz!Box fails to go steady green, please contact the Technical Support team as per contact details provided in this Quick Start Guide.

Example of a Data & Landline Socket

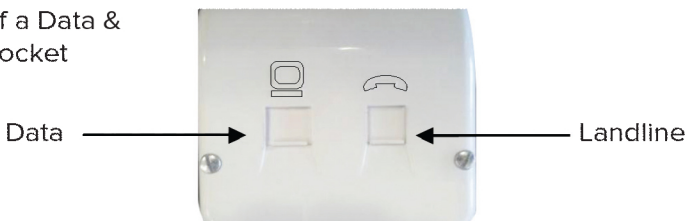

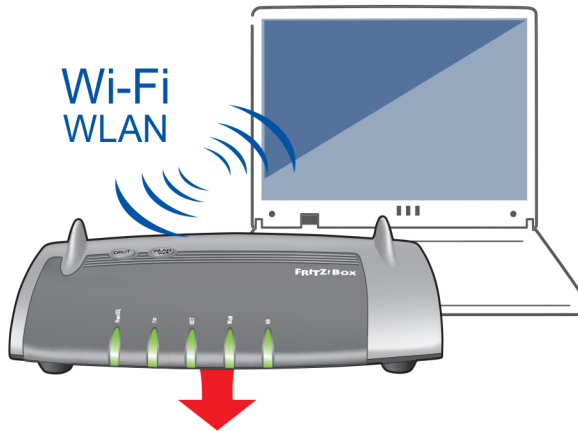

FRITZ!Box 7430 Edition UK
Installation: <http://fritz.box>

WLAN Network (SSID) FRITZ!Box password
FRITZ!Box 7430 TP zigzag5481

WLAN Network Key (WPA2)
1234 5678 9876 5432 1234

Serial no. Power units:
311POW069 + 311POW074
311POW152 + 311POW158
12V 1.4A

CWMP account

AVM GmbH, 10547 Berlin Article no.: 2000 2788

or

FRITZ!Box Fon WLAN 7360 Edition UK
Installation: <http://fritz.box> Article no.: 2000 2638

WLAN Network Key (WPA2):
1234 5678 9876 5432 1234

Serial no. CWMP account:

MAC address:
CB.OE: 14 F4 B0 7A

Use only with the power unit **311POW069** 12V 1.4A

© AVM GmbH avm.de

OR

FRITZ!Box 7560 Edition UK
Installation: <http://fritz.box>

WLAN Network (SSID) FRITZ!Box password
FRITZ!Box 7560 NB zigzag5481

WLAN Network Key (WPA2)
1234 5678 9876 5432 1234

Serial No. Power unit:
311POW159
12V 2A

CWMP account

AVM GmbH, 10547 Berlin Art. no.: 2000 2834



Step 3: Wi-Fi Network Security Key / Password

- To connect your devices wirelessly, enter the “WLAN Network Key (WPA2)” into the “Security key” or “password” field on your device & screen from Step 6. You can locate your unique “WLAN Network Key” on the sticker attached to the base of the Fritz!Box.
- Click connect.

All done. You should now be connected. Enjoy your Digiweb broadband.

Please note:

- The WLAN Network Key “12345678987654321234” shown in the example above is for illustration purposes only.
- The Fritz!Box password “zigzag5481” shown in the example above is for illustration purposes only. It is NOT your Wi-Fi password / key. See page 11 and page 14 for Fritz!Box password use.

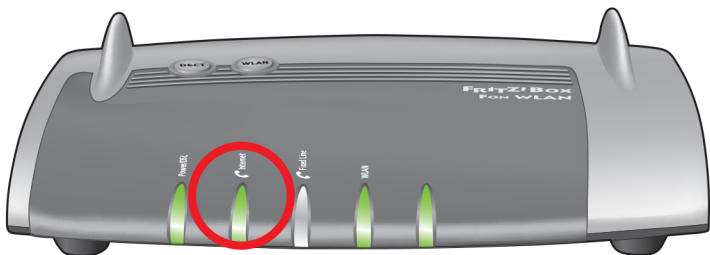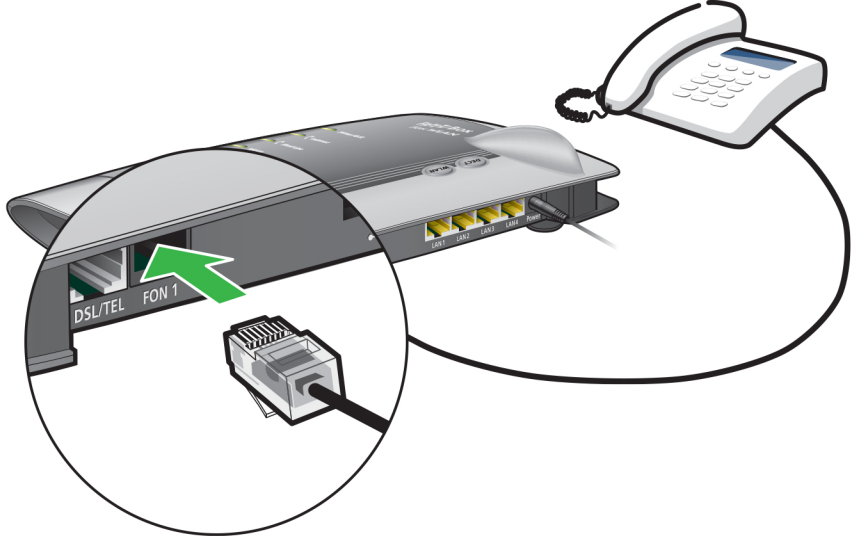

Step 4: Broadband Talk VoIP Phone Setup

If you have opted for Digiweb's Broadband Talk VoIP telephone service, please connect your telephone to the "FON 1" port on the back of the Fritz!Box to start using your VoIP telephone service. The VoIP Internet light circled above will be steady green when Digiweb Broadband Talk VoIP is active.

For more details on VoIP visit: <http://www.digiweb.ie/support/phone-setup/>

If you have opted for Digiweb's fixed line telephone service, please connect your telephone to the telephone socket as installed by the telecoms engineer during the installation process. Do not connect your telephone to the Fritz!Box.